

ALL CONDUCTORS 26 AWG

8	ORG
7	GREY
6	BLUE
5	WHITE
4	RED
3	ORG
2	GREY
1	BLUE


PINS BAG - MOLEX 50079-8100  
 PINS REEL - MOLEX 50079-8000

TOP VIEW

MOLEX 51021-0800

PIN 8 ORG WIRE

PIN 1 BLUE WIRE

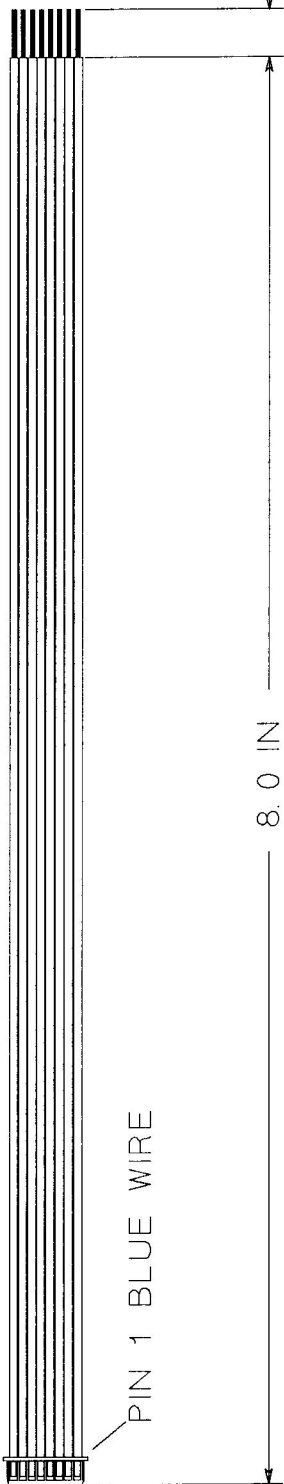

WIRE SPECIFICATIONS

1061/MIL-W-16878/1/TTYPE B			
SEMI-RIGID POLYVINYLCHLORIDE (PVC) (80C) (300V) (UL&CSA)			
WCWC AWG CONDUCTOR	NOMINAL	APPROX.	CSA
P/N SIZE STRANDING	INSULATION	DIAMETER	LBS/MFT
1061/26 26 7/34 TINNED	.009	.039	2
			1061
			SR-PVC

Applied Concepts Inc. - 4/1/08  
 Universal Input Cable Assembly - 27-A0001